



Club 39 interconnecting

(single leaf)



Timber Acoustic & Fire Rated Doorsets



Rw 55dB
CSTB 31629



EI30_{FD30}
EITHER SIDE



Smoke Seal

S_a Classification
EN 13501-2 - BS EN 1634-3

Door Leaf

- 2 x CLUB 39 EI30 - 41dB doorset back to back
- Huet solid timber core
- Thickness: 40mm hardwood stiles all round
- Lippings
- Hardwood
- Concealed or exposed rebated lippings

Door Frame

- Hardwood
- Rebated monoblock frame
- Variety of widths
- Frame can be lacquered, stained or varnished
- Frame can be wrapped with wood veneer to match door leaf facings

Choice of Door Facings

- Primed
- Wood veneers
- Laminated
- White paint finish + other colour available by request
- Grooved to a wide choice of standard and bespoke finishes

Ironmongery

- 3 or 4 lift-off hinges - 140 x 70mm mild or stainless steel
- Cut-outs/mortices are available to suit a variety of locks and handles

Perimeter Seals

- Intumescent seals factory fitted (within the frame or leaf)
- Combined smoke and acoustic seals fitted within the frame and leaf
- Flat threshold 35 x 12mm



Tel: +33 22 812 0413
Rgd Office: JH INDUSTRIES
30 rue Pauline de Lézardière
85300 Challans FRANCE
www.huet-doors.co.uk



Aveiro +351 234 580 195
Lisboa +351 210 155 113
Porto +351 220 138 550
www.acustekpro.com



All sizes are in mm
JUNE 2020




Club 39 interconnecting


(single leaf)



Timber Acoustic & Fire Rated Doorsets

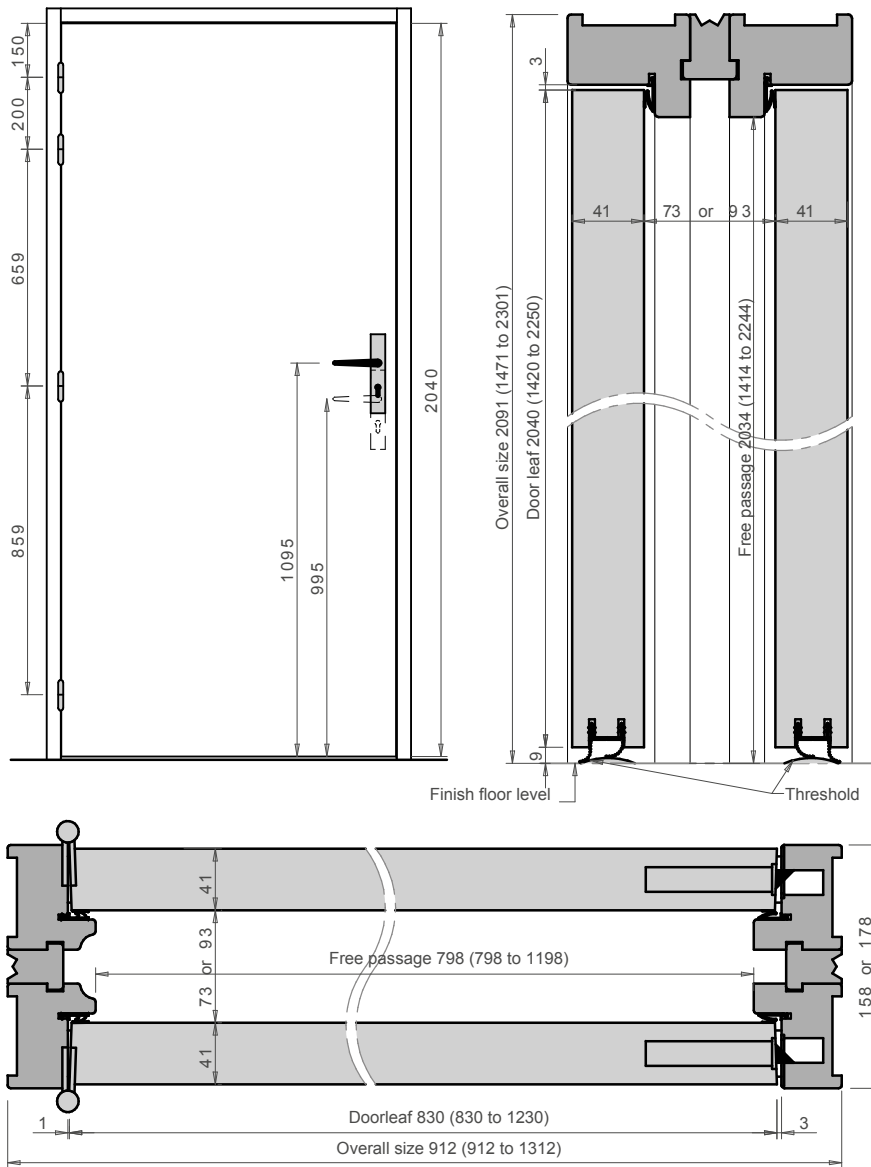

Flat threshold 35x12



Tel: +33 22 812 0413
 Rgd Office: JH INDUSTRIES
 30 rue Pauline de Lézardière
 85300 Challans FRANCE
 www.huet-doors.co.uk



Aveiro +351 234 580 195
 Lisboa +351 210 155 113
 Porto +351 220 138 550
 www.acustekpro.com



All sizes are in mm
 JUNE 2020