

ADX Climat

Apartment/Hotel external exposed (single leaf)



Timber Acoustic & Fire Rated Doorsets







3c Stability*



Door Leaf

- Huet multi-layer insulating core
- Thickness: 51mm hardwood stiles all round
- High stability leaf due to the inclusion of 2 steel sheets
- Plywood panels for exterior use

Door Frame

- Hardwood (of our choice)
- Rebated monoblock frame
- Variety of widths
- Extension linings available
 - Frame can be lacquered, stained or varnished
- Frame can be wrapped with wood veneer to match door leaf facings

Choice of Door Facings

- Rough to be finished
- Primed
- Wood veneers to match approved samples
- Laminated
- Engraved to a wide choice of standard and bespoke finishes

Ironmongery

- 4 hinges
 - Cut-outs/mortices are available to suit a variety of locks and handles
- Cut-outs/mortices are available to suit a large choice of electromagnetic lock
- Spy hole

Perimeter Seals

- Combined smoke and acoustic seals fitted within the frame and leaf
- Swiss threshold 35x20mm wrapped with stainless steel

*Stability of the door leaf is an important factor, particularly in areas of temperature variance between rooms or between rooms and corridors. Any distortion of the door leaf will result in the seals not functioning correctly. With the inclusion of a minimum of 2 steel sheets and other materials, Huet door leafs offer less than 2mm of distortion. The result is a door leaf and seal which continues to perform even with wide temperature differences.



DJH INDUSTRIES




Tel: +33 22 812 0413 Rgd Office: JH INDUSTRIES 30 rue Pauline de Lézardière 85300 Challans FRANCE www.huet-doors.co.uk



Aveiro +351 234 580 195 Lisboa +351 210 155 113 Porto +351 220 138 550 www.acustekpro.com

All sizes are in mm



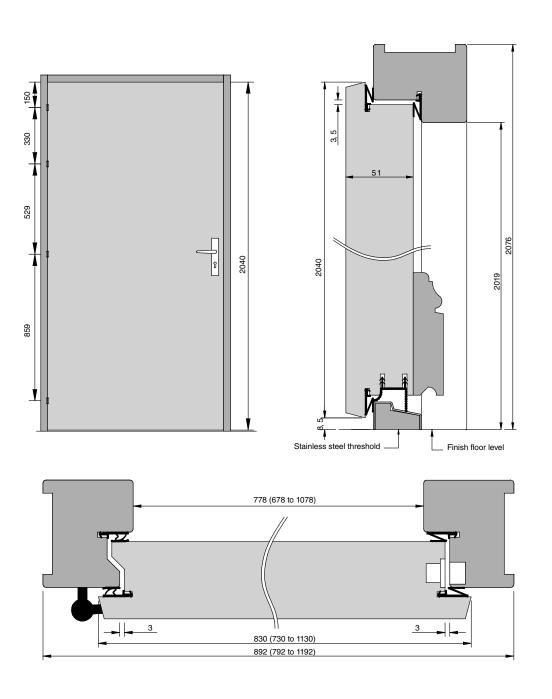



Tel: +33 22 812 0413 Rgd Office: JH INDUSTRIES 30 rue Pauline de Lézardière 85300 Challans FRANCE www.huet-doors.co.uk



Aveiro +351 234 580 195 Lisboa +351 210 155 113 Porto +351 220 138 550 www.acustekpro.com



All sizes are in mm